
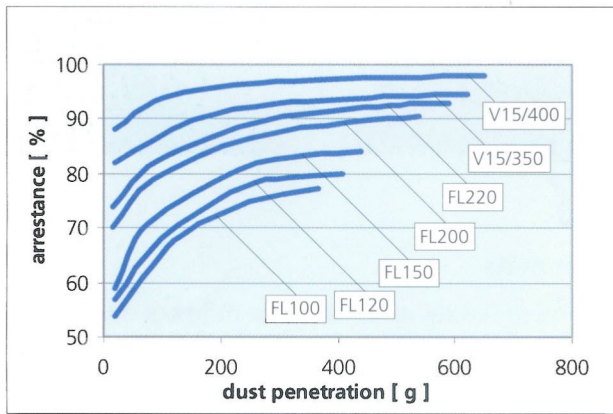
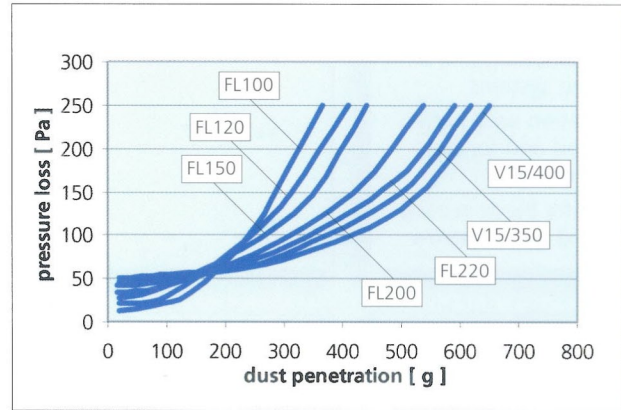


Rough filtration mats G2 – G4

FL100, FL120, FL150, FL200, FL220, V15/350, V15/400

Filter technical test datas *

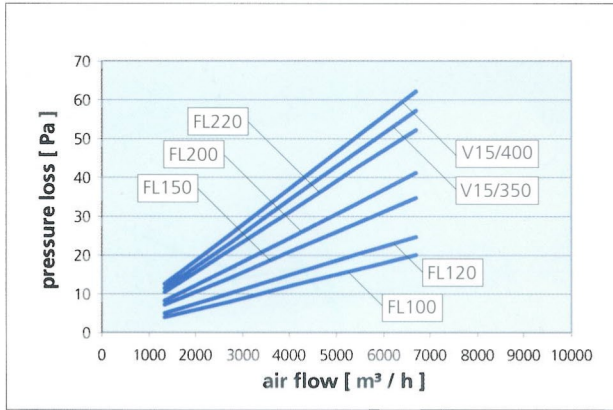

specification	material thickness approx. mm	weight per sqm g / m ²	rated air flow m ³ / h / m ²	air velocity speed m / s	initial pressure loss Pa	middle arrestance %	dust holding capacity g / m ²	final pressure loss Pa	filter class
FL 100	5	100	5400	1,5	16	70	370	250	G2
FL120	8	120	5400	1,5	18	75	390	250	G2
FL 150	10	150	5400	1,5	20	78	410	250	G2
FL 200	20	200	5400	1,5	23	89	550	250	G3
FL 220	22	220	5400	1,5	27	90	610	250	G4
V15 / 350	18	280	5400	1,5	46	92	630	250	G4
V15 / 400	22	350	5400	1,5	50	94	650	250	G4

special rough filtration mats

EA 30	30	350	5400	1,5	50	95	680	250	G4
EA 40	40	400	5400	1,5	53	96	700	250	G4
EA 50	50	420	5400	1,5	55	96	730	250	G4

Indication:
tested according to EN779

* With indicated test datas it gives average values with tolerances due to variations of the production.